




AIRCON TEKNIK A/S

## ▶ PPI 30

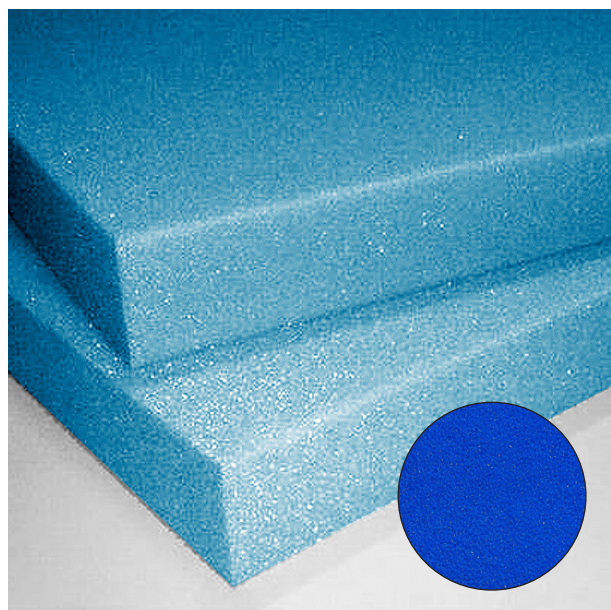

- ▶ Foam Filter - 100% polyurethane
- ▶ High moisture resistance
- ▶ High thermal resistance
- ▶ Long life foam
- ▶ Low operating costs

Type: PU polyurethane foam

Thickness range: 4-500 mm

Density: 25 kg/m<sup>3</sup> PN-EN-ISO 845

Tensile strength: min. 110 kPA PN-EN-ISO 1798

Elongation at break: 90% PN-EN-ISO 1798

Airflow: very high

Thermal resistance: -40/+140°C

Colour: blue

Available sheets: 1250x2000 mm  
or cut to size

#### Material:

is produced on the number of pores of 10-45 PPI. It has 97% of the pores open. It is characterized by high resistance to moisture and extremely large fluid collection capability. Washable.

#### Application:

Filter foam used in air filtration, aquariums, swimming pools.

#### Storage:

products should be stored in a dry place (humidity up to 70%) at temperatures between +5°C to +30°C.

We reserve the right to make changes in the technical specifications at any time without notice, as a result of continuous improvement of our products.