

INBYGGNADSMODELL

SRR-ZS




SRR35ZS-W / SRC35ZS-W




Inbyggd kondensvattenpump

Med 600mm lyfthöjd av kondensvatten innan självfall möjliggör kondensvattenpumpen fler placeringar för ett integrerat och dolt montage.



Luftintaget kan flyttas till ett nedre luftintag (tillval)

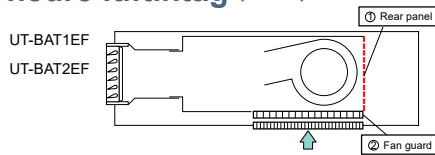

Touchkontroll som tillval



RC-EX3A



Trådlös fjärrkontroll



SRC35ZS-W2

- Låg bygghöjd om 200 mm för enkel integrering
- SRR serien består av fler modeller som även passar till Multisplit
- Inställbart statiskt tryck möjliggör även kanalanslutning
- Tyst drift

SPECIFIKATIONER

Indoor unit				SRR35ZS-W	SRR50ZS-W
Outdoor unit				SRC35ZS-W2	SRC50ZSX-W3
Power source				1 Phase, 220 - 240V, 50Hz	
Nominal cooling capacity (Min~Max)		kW	3.5 (0.9 ~ 4.1)		5.0 (1.2 ~ 6.0)
Nominal heating capacity (Min~Max)		kW	4.2 (1.0 ~ 5.2)		5.4 (1.0 ~ 8.2)
Power consumption		Cooling/Heating	0.93 / 1.01		1.42 / 1.39
EER/COP		Cooling/Heating	3.76 / 4.16		3.52 / 3.88
Max. running current				A	
Sound power level		Indoor	Cooling/Heating	9	
		Outdoor	Cooling/Heating	15	
Sound pressure level		Indoor	Cooling (Hi/Me/Lo/Ulo)	57 / 60	
			Heating (Hi/Me/Lo/Ulo)	59 / 61	
		Outdoor	Cooling/Heating	62 / 62	
			Cooling (Hi/Me/Lo/Ulo)	63 / 62	
			Heating (Hi/Me/Lo/Ulo)	41 / 37 / 34 / 29	
			Cooling/Heating	43 / 39 / 37 / 32	
			Cooling/Heating	50 / 50	
			Cooling (Hi/Me/Lo/Ulo)	51 / 49	
			Heating (Hi/Me/Lo/Ulo)	10.0 / 8.5 / 7.0 / 5.0	
			Cooling/Heating	13.5 / 11.0 / 10.0 / 7.5	
			Cooling/Heating	10.5 / 9.5 / 8.5 / 6.5	
			Cooling/Heating	14.0 / 12.5 / 11.0 / 8.5	
			Cooling/Heating	31.5 / 27.8	
			Cooling/Heating	39.0 / 33.0	
External static pressure				Pa	
				35	
				50	
Exterior dimensions		Indoor	HeightxWidthxDpth	mm	
		Outdoor		200 x 750 x 500	
				540 x 780(+62) x 290	
				640 x 800(+71) x 290	
Net weight		Indoor / Outdoor		kg	
				20.5 / 34.5	
				24.0 / 45.0	
Refrigerant		Type/GWP	R32 / 675		
		Charge	kg/TCO ₂ Eq		
			0.78 / 0.527		1.30 / 0.878
Refrigerant piping size		Liquid/Gas	ø mm		
			6.35(1/4") / 9.52(3/8")		6.35(1/4") / 12.7(1/2")
Refrigerant line (one way) length[chargeless length]			m		
			Max. 20 [15]		Max. 30 [15]
Vertical height differences		Outdoor is higher/lower	m		
			Max. 10 / Max.10		Max. 20 / Max.20
Outdoor operating temperature range		Cooling	°CDB		
		Heating	-15~46		-15~46
			-25~24		-35~24
Bottom air inlet kit (option)			UT-BAT1EF		UT-BAT2EF

* The data are measured under the following conditions(ISO-T1, H1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Sound level indicates the value in anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

* 'tonne(s) of CO₂ equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.

*1 The maximum external static pressure can be used up to 35Pa(25*35ZS), 50Pa(50*60ZS), but the airflow will be reduced.

Nyhet
våren 2024