

D-TEK Stratus[®]

REFRIGERANT LEAK DETECTOR AND PORTABLE MONITOR

Find profit-crushing leaks in no time.

D-TEK Stratus combines the excellent leak detection of D-TEK Select and the cloud hunting capability of a large portable monitor all in one hand-held unit. Quickly locate the area containing the leak using the large, easy-to-read LCD display, and then pinpoint the leak with one instrument! D-TEK Stratus is the next big thing in refrigerant leak detection.

Leak Detector Selection Guide on page 21



SAE J2791
SAE J2913



**WATCH OUR
VIDEO!**




ADVANTAGES

- Sensitivity of 0.03 oz./year (1 g/year)
- Innovative Cloud Hunting mode with ppm helps locate leaks faster than ever
- Cloud Hunting and Pinpoint modes is like having two leak detectors in one
- Detects CFCs, HCFCs, HFCs, HFOs, blends (including A2Ls), and CO₂*
- All new, redesigned infrared sensor
 - Longest sensor life in the industry
 - Easy field replacement
- New lithium ion battery
 - Quick charge capability
 - Easy field replacement
- Automatic and manual zero modes
- Sensitivity will not degrade over time
- Rugged carrying case included

* Requires optional CO₂ sensor

D-TEK STRATUS REFRIGERANT LEAK DETECTOR AND PORTABLE MONITOR

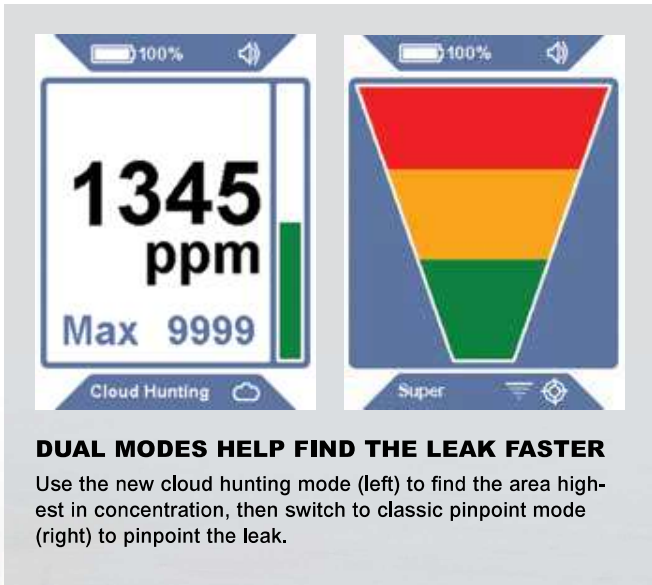

SPECIFICATIONS

Includes	D-TEK Stratus Infrared sensor Lithium ion battery Spare filters AC wall charger DC car charger Extra-long probe Carrying case Earbuds
Compatible refrigerants	R22, R32, R134a, R404a, R407c, R410a, R422b, R448a, R449a, R452a, R452b, R507 (AZ50), R1234yf, CO ₂ (requires CO ₂ sensor) ammonia, SF ₆ , and more
Minimum sensitivity	0.03 oz./yr. (1 g/yr.)
Sensitivity per EN14624	1g/yr.
Sensitivity for R744 (CO ₂)	0.07 oz./yr. (2 g/yr.) (requires CO ₂ sensor)
Power source	Lithium ion battery (rechargeable) USB (can operate while charging)
Battery life	~8 hours (cloud hunting mode) ~10 hours (pinpoint mode)
Weight	1.10 lb (500g)
Certifications	CE SAEJ2791 SAEJ2913 EN14624:2012 A2L certified
Patents (Pending)	Application #10 2018 206 877.1 Application #18171080.7 Application #10 2018 208 826.8
Probe length(standard probe)	~17 in. (43 cm)
Warranty	Two-year over-the-counter

ORDERING INFORMATION

D-TEK Stratus (includes refrigerant sensor only)	724-202-G1
D-TEK Stratus (includes CO ₂ sensor only)	724-204-G1

Accessories and Replacement Parts

Earbuds	721-607-G1
TEK-Check R134a reference leak	703-080-G10
Wall charger (US and international)	721-606-G1
12 V (dc) car charger	721-605-G1
Lithium ion battery	721-702-G1
Battery charging cradle	721-610-G1
Battery/cradle combo	721-604-G1
Extra-long probe	721-611-G1
Needle probe extension	721-612-G1
Refrigerant sensor (Detects CFCs, HFCFs, HFCs, and HFOs)	724-701-G1
CO ₂ sensor	724-701-G2
Filter cap	712-705-G1
Filter cartridges	712-707-G1
Carrying case	724-700-G1